




DEL ITEM	ANCOR P/N	LENGTH (IN)	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	TENSILE STRENGTH	PACK QUANTITY	MIN-MAX BUNDLE DIAMETER
962303	199203	4"	100 ± 3	4.5 ± 0.30	1.0 ± 0.10	18LB	100	0.06"-0.81" (1.5-20.5mm)
962703	199249	6"	150 ± 3	6.3 ± 0.30	1.10 ± 0.10	40LB	100	0.08"-1.42" (2-36mm)
962903	199207	8"	200 ± 3	7.9 ± 0.30	1.2 ± 0.10	75LB	100	0.12"-2" (3-50.8mm)
963103	199211	11"	280 ± 3	7.9 ± 0.30	1.2 ± 0.10	75LB	100	0.12"-3" (3-76.2mm)
963303	199215	14"	360 ± 3	7.9 ± 0.30	1.2 ± 0.10	75LB	100	0.12"-4" (3-101.6mm)

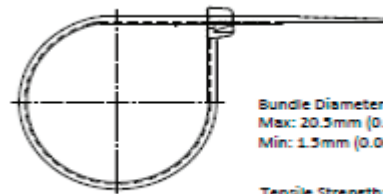

	<b>ANCOR</b> ANCOR CABLE TIES (BLACK)
MATERIAL	POLYAMIDE 6.6 NATURAL + ~1% CARBON BLACK
FLAMMABILITY	UV 94 - V2
HUMIDITY ABSORPTION	2.7% - 2.8%
TEMPERATURE RATING	-40°F - 185°F, -40°C - 85°C
COLOR	UV BLACK
STANDARDS	ROHS, REACH AND PAHS, UL LISTED AND HALOGEN FREE
SEPTEMBER 2024	
DIAGRAM NOT TO SCALE	

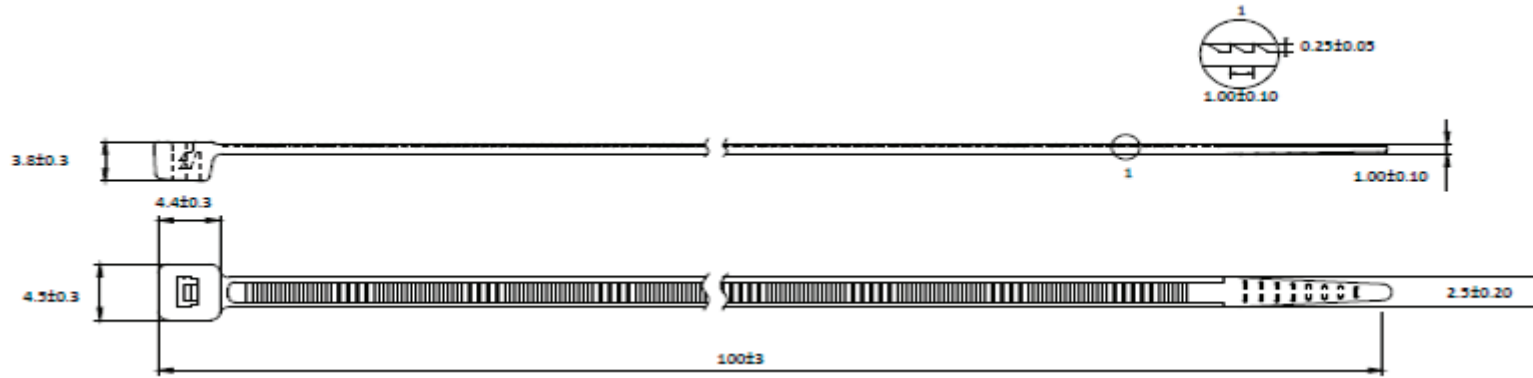

E258930  
33AS  
TYPE 21, 21S  
LH-S-350-14

