
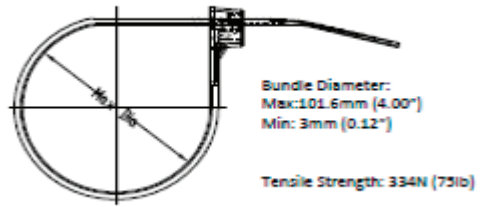



DEL ITEM	LENGTH (IN)	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	TENSILE STRENGTH	PACK QUANTITY	MIN-MAX BUNDLE DIAMETER
9722	4"	100 ± 3	4.5 ± 0.30	1.0 ± 0.10	18LB	1000	0.06"-0.81" (1.5-20.5MM)
9726	6"	150 ± 3	6.3 ± 0.30	1.10 ± 0.10	40LB	1000	0.08"-1.42" (2-36MM)
9728	8"	200 ± 3	7.9 ± 0.30	1.2 ± 0.10	75LB	1000	0.12"-2" (3-50.8MM)
9730	11"	280 ± 3	7.9 ± 0.30	1.2 ± 0.10	75LB	1000	0.12"-3" (3-76.2MM)
9732	14"	360 ± 3	7.9 ± 0.30	1.2 ± 0.10	75LB	1000	0.12"-4" (3-101.6MM)

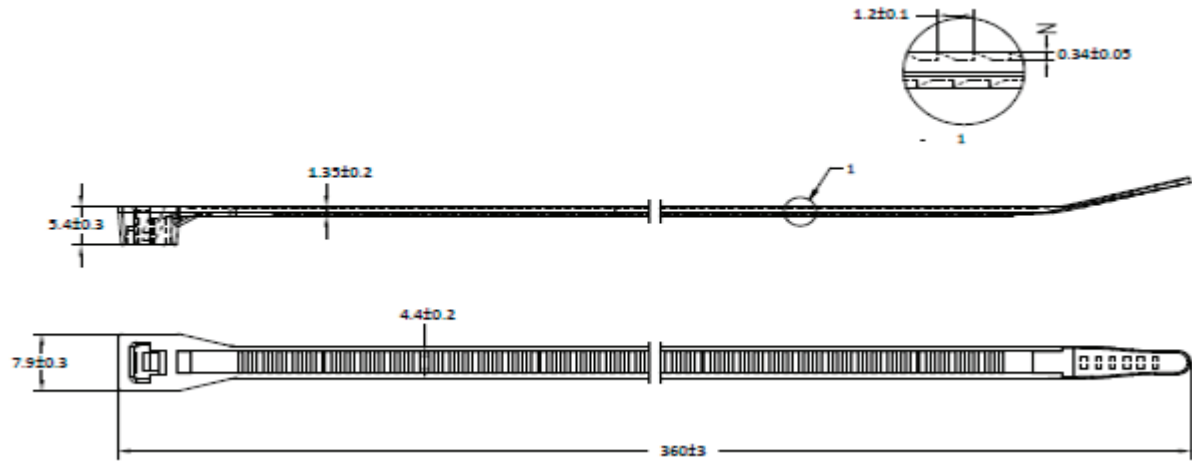

	CABLE TIES (NATURAL)
MATERIAL	POLYAMIDE 6.6 NATURAL
FLAMMABILITY	UV 94 - V2
HUMIDITY ABSORPTION	2.7% - 2.8%
INSTALLATION TEMPERATURE	-20°C - 85°C
MAX SUSTAINABLE TEMPERATURE	+110°C
COLOR	NATURAL
SEPTEMBER 2024	
DIAGRAM NOT TO SCALE	