



PART NUMBER	LENGTH (IN)	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	MIN/MAX BUNDLE DIAMETER	TENSILE STRENGTH	MINIMUM QUANTITY
999103	4"	102 ± 5	2.4 ± 0.15	0.9 ± 0.10	2. 0/23	18LB	100
999303	7"	186 ± 5	4.7 ± 0.20	1.15 ± 0.10	3. 5/45	50LB	100
999503	11"	305 ± 5	4.8 ± 0.20	1.25 ± 0.10	3. 5/82	50LB	100
999703	14"	361 ± 5	4.8 ± 0.20	1.3 ± 0.10	3.5/100	50LB	100
9991	4"	102 ± 5	2.4 ± 0.15	0.9 ± 0.10	2. 0/23	18LB	1000
9993	7"	186 ± 5	4.7 ± 0.20	1.15 ± 0.10	3. 5/45	50LB	1000
9995	11"	305 ± 5	4.8 ± 0.20	1.25 ± 0.10	3. 5/82	50LB	1000
9997	14"	361 ± 5	4.8 ± 0.20	1.3 ± 0.10	3.5/100	50LB	1000

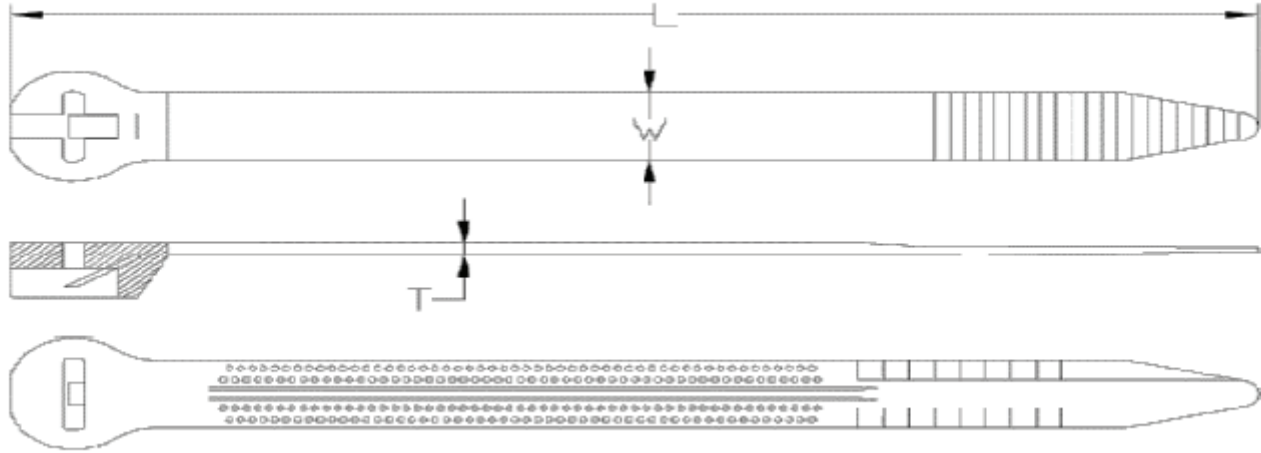

	METAL PAWL PRECISION CABLE TIE
COLOR	UV BLACK
FLAMMABILITY	UL94 V-2
TEMPERATURE RANGE	-40C - 85C
SEPTEMBER 2024	
DIAGRAM NOT TO SCALE	